

# BAYLAN

## WATER METERS


### TK-25

## Multi jet Dry type Water Meter




#### GENERAL

- MID Certified
- Multi jet working principle assures a long service time
- Suitable for potable water
- 360° rotating lid
- Low pressure loss, high sensitivity at initial flow
- Electrostatic painted body made of corrosion resistant brass
- Protection against external magnetic fields
- Available for optical reading • Non return valve
- 3 years of warranty • Almost no maintenance
- Suitable for cold water up to 50°C
- Service and spare parts available for 10 years

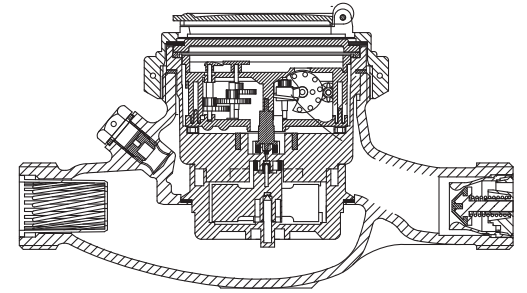


#### PERFORMANCE DATA

Overload Flowrate	Q4	m <sup>3</sup> /h	3,125
Permanent Flowrate	Q3	m <sup>3</sup> /h	2,5
Transitional Flowrate	Q2	m <sup>3</sup> /h	0,025
Minimum Flowrate	Q1	m <sup>3</sup> /h	0,0156
Q3/Q1 (MI-001 OIML R49)	-		≤160
Mounting on the network	-		Horizontal
Maximum Registration Capacity	m <sup>3</sup>		9999/99999/99999,99/99999,999
Initial Flowrate	Qi	l/h	7
Maximum Working Pressure	bar		16
Maximum Working Temperature	°C		50
Pressure Loss	bar		0,63
Smallest Reading Resolution	m <sup>3</sup>		0,00005
Class	-		Class 1 / Class 2
Quantity per package	-		10
Package dimensions	cm		25x46,5x22

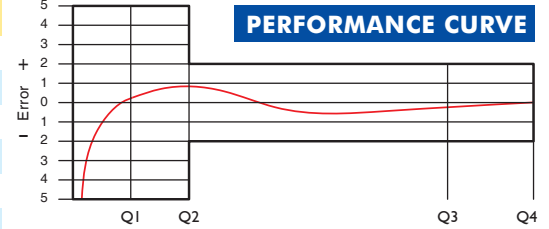


#### PRESSURE LOSS CURVE

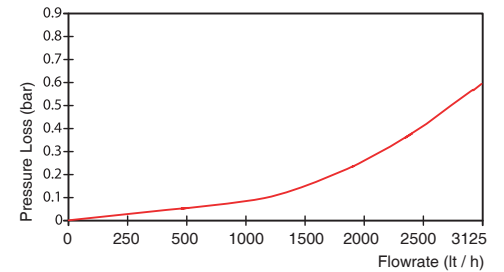

#### DIMENSIONS

Nominal diameter	DN	15	20	mm
Connecting diameter	D	G 3/4	G 1	B
Total overall meter height	H	113,4	112,8	mm
Axis height	h	31,5	31,5	mm
Length	L	190	190	mm
Width	B	92	92	mm
Length with connections	LB	270	270	mm
Unit weight		1,20	1,13	kg
Package Weight (without connect)		12,90	12,20	kg
Package Weight (with connect)		14,50	14,10	kg

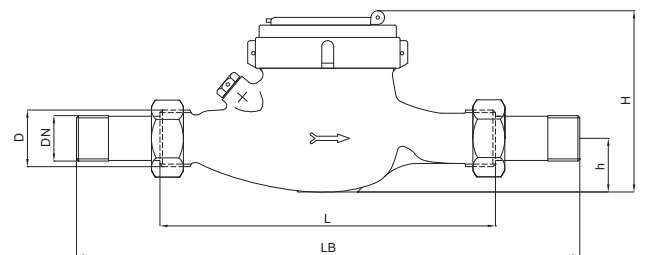

"Due to continuous development of our products, we reserve the right to modify our product design or construction without prior notice."