

# BAYLAN

## WATER METERS


### TK-3P

#### Multi jet Dry type Water Meter



#### GENERAL


- MID Certified
- Multi jet working principle assures a long service time
- Low pressure loss, high sensitivity at initial flow
- 360° rotating lid • Non return valve
- Vacuumed and magnet protected mechanism
- Special glass with high resistance to pressure and impact
- Plastic body with high resistance to pressure and impacts
- Protection against external magnetic fields
- Available for optical reading • Almost no maintenance
- Pulse output and AMR reading features are optional
- 3 years of warranty • Suitable for potable water
- Suitable for cold water up to 50°C
- Stainless steel register cup is optional
- Service and spare parts available for 10 years
- Brass or plastic end connection options

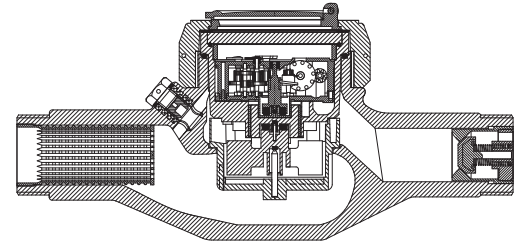


#### PERFORMANCE DATA

Overload Flowrate	Q4	m <sup>3</sup> /h	7,875
Permanent Flowrate	Q3	m <sup>3</sup> /h	6,3
Transitional Flowrate	Q2	m <sup>3</sup> /h	0,0504
Minimum Flowrate	Q1	m <sup>3</sup> /h	0,0315
Q3/Q1 (MI-001 OIML R49)			≤200
Mounting on the network			Horizontal
Maximum Registration Capacity			99999 / 99999,99 / 99999,999
Initial Flowrate	Qi	l/h	7
Maximum Working Pressure	bar		16
Maximum Working Temperature	°C		50
Pressure Loss	bar		0,63
Smallest Reading Resolution	m <sup>3</sup>		0,00005
Class			Class 1 / Class 2
Quantity per package			10

#### PRESSURE LOSS CURVE

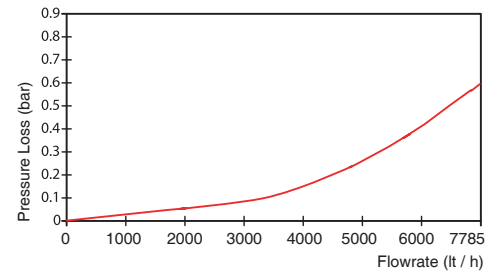


#### PERFORMANCE CURVE

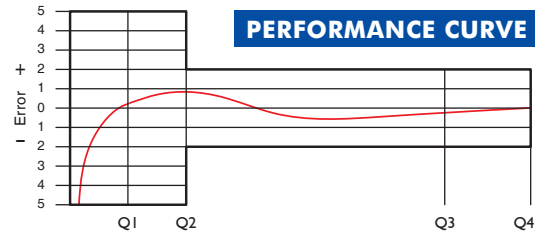

#### DIMENSIONS

Nominal diameter	DN	25	mm
Connecting diameter	D	G1 1/4	B
Total overall meter height	H	124	mm
Axis height	h	44,5	mm
Length	L	260	mm
Width	B	101	mm
Length with connections	LB	380	mm
Unit weight		0,94	kg
Package Weight (without connect)		10,60	kg
Package Weight (with connect)		11,60	kg
Package dimensions		26x52x30	cm

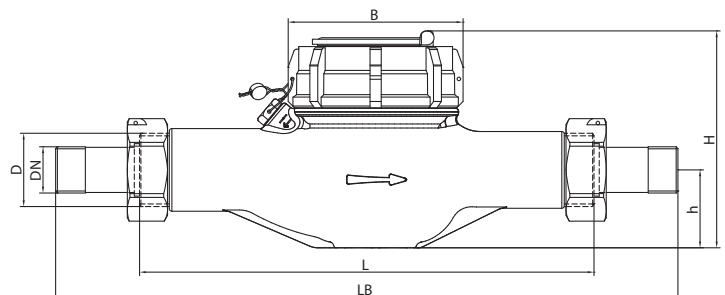

"Due to continuous development of our products, we reserve the right to modify our product design or construction without prior notice."